

Finger Vein Enhancement Using Segmentation and SVM

Kirandeep Kaur¹ Shashi Bhushan²

Chandigarh Engineering College, Landran , Punjab,India.

Abstract— Finger vein is a unique physiological biometric for identification of individuals based on the physical characteristics and parameters of the vein patterns in the human. This technology is at present in use or development for a wide range of applications, which includes credit card authentication, security in automobile, employee time and tracking attendance, computer and network authentication, security at end points and automated teller machines. The proposed work simultaneously acquires information of the finger-vein and low-resolution finger image. Images and combines these two techniques using a better score-level combination strategy. Analysis of the previously is proposed for finger-vein identification approaches in image processing and develop a proposed approach that describes its superiority over prior published efforts. In this thesis developed and analyzed three new score-level combinations, i.e., Repeated Line Tracking , Gabor Filter and Segmentation and SVM works comparatively to evaluate analysis them with more popular technique score-level fusion approaches to certain information details their effectiveness in the proposed system.

Keywords: Analysis of Finger Vein Recognition, Image Segmentation, Support Vector Machine (SVM)

I. INTRODUCTION

Finger vein is a unique physiological biometric for identifying individuals based on the physical characteristics and attributes of the vein patterns in the human finger [5]. It is a fairly recent technological advance in the field of biometrics that is being applied to different fields such as medical [5], financial, law enforcement facilities and other applications where high levels of security or privacy is very vital. And this technology is very impressive because it requires only small and relatively cheap single-chip design, and has an identification process that is contact-less and of higher accuracy when compared with other identification biometrics like fingerprint, iris, facial and others. This higher accuracy rate of finger vein is not unconnected with the fact that finger vein patterns are virtually impossible to forge thus it has become one of the fastest growing new biometric technology that is quickly finding its way from research labs to commercial development.

Traditional Biometric authentication system will be provided by using passwords or Personal Identification Numbers (PINs), which are simple to design and implement but there is more vulnerable to the risk analysis of exposure and being forgotten. Human physiological or behavioral features are using biometrics for personal identification is very effective and is becoming one of the more interesting and popular for promising alternatives to the traditional password or PIN based authentication techniques. As we step forward into the new millennium techniques, identity thefts and Internet scams are common to becoming

increasingly. Many governments and institutions are working these technologies to safeguard for their airports, hospitals, prisons and other sensitive areas. In this field, it is imperative analysis that we tend continuously upgrade our security systems, and the use of biometrics is a step towards the security upgrading that are required continuously.

There are two types of Finger Authentication:

- Automatic Finger image Authentication System (AFAS).
- Automatic Finger image Identification System (AFIS).

In AFAS the input is an identity and a finger image, the output is an answer of yes or no indicating whether the input image belongs to the person whose identity is provided. The system compares the input image with the one addressed by identity in the data base.

In AFIS the input is just a finger print and the output is a list of identities of persons that can have the given finger image and a score for each identity indicating the similarity between the two finger image. It is possible to provide partial identity information to narrow the search space. The System compares the input image with many records in the database. Recognition is defined as a process involving perception and associating the resulting information with one or combination of more than one of its memory contents. Visual perception means deriving information from a specific scene.

Biometrics systems have been an important area of research in recent years. There is two important utilization of biometrics system:

- Authentication or Verification of person's identity.
- Identification in which a person's identity is sought using biometrics scene available.

Any physiological or behavioral characteristics can be used to make personal identification as long as it satisfies the requirements like universality, uniqueness, performance, collect ability and Permanence. Automated human identification using physiological and/or behavioral characteristics, i.e. biometrics, is increasingly mapped to new civilian applications for commercial use.



Figure 1: Hitachi of Japan history of research & development on finger-vein recognition Technology

The tremendous growth in the demand for more user friendly and secured biometrics systems has motivated researchers to explore new biometrics features and traits. Biometric Authentication technology is the one that conduct a personal identification by using human physiological characteristics and behavioral characteristics. Vein is free from the impact of external contamination and minor injuries and information characteristic is insensitive to the changes in humidity and temperature. What is more, it is easy to collect, readable and so on. Because of the above unique advantages, the vein recognition is widely used in biometric identification. In recent years, vein recognition has become the most innovative and sophisticated hand biometric identification technology. In the area of biometric identification, security and convenience of the system are important. In particular, the systems require high accuracy and fast response times. Biometric methods include those based on the pattern of fingerprints, facial features, the iris, the voice, the hand geometry, or the veins on the back of the hand. However, these methods do not necessarily ensure confidentiality because the features used in the methods are exposed outside the human body. These methods can therefore be susceptible to forgery.

IMAGE SEGMENTATION

Fingerprint image is described by two regions namely the foreground region and the background region. The foreground regions are the regions containing the ridges and valleys. The ridges are the raised and dark regions of a fingerprint image while the valleys are the low and white regions between the ridges. The foreground regions often referred to as the Region of Interest (RoI). The background regions are mostly the outside regions where the noises introduced into the image during enrolment are mostly found. The essence of segmentation is to reduce the burden associated with image enhancement by ensuring that focus is only on the foreground regions while the background regions are ignored.

Preserving the topological structure of a finger-vein network is very important for a finger-vein segmentation task because the distinctive and robust features of finger-vein patterns mainly depend on the structure forms of veins,. Unfortunately, the state-of-the-art finger-vein network segmentation methods are far from perfect in unabridged finger-vein network extraction. Although the proposed MSMR can significantly improve the contrast between venous regions and non-venous regions, it is still difficult to obtain an integrated finger-vein network in practice. This is because

- the vein ridge information often varies greatly in intensity.
- the vein ridges with great intensity variation always interlace. To tackle these problems, we resort to image matting for finger-vein network segmentation.

Image matting refers to the problem of softly and accurately extracting a foreground object of interest from a single input image with limited user input . However, the performance of the state-of-the-art image matting is

usually undesirable without user guides, that is, manually providing proper constraints (called trimap, a pre-segmented image consisting of three regions of foreground, background and unknown) of the foreground and background in advance is critical for accurate matting-based image segmentation. Actually, manual intervention is impossible for finger-vein network segmentation. Hence, to make image matting suitable for finger-vein segmentation, a new scheme is proposed for automating the matting process in finger-vein network segmentation.

SUPPORT VECTOR MACHINE (SVM)

The Support Vector Machine (SVM) is a state-of-the-art classification method introduced in 1992 by Boser, Guyon, and Vapnik. The SVM classifier is widely used in bioinformatics (and other disciplines) due to its high accuracy, able to calculate and process the high-dimensional data such as gene expression, and exhibility in modelling diverse sources of data. SVM belong to the general category of kernel methods. A kernel method is an algorithm that depends on the data only through dot-products. When this is the case, the dot product can be replaced by a kernel function which computes a dot product in some possibly high dimensional feature space.

The main advantages of SVM is the ability to generate non-linear decision boundaries using methods designed for linear classifiers. Second, the use of kernel functions allows the user to apply a classifier to data that have no obvious fixed-dimensional vector space representation. The example of such data in bioinformatics are sequence, either DNA or protein, and protein structure.

Support Vector Machines (SVM) have recently gained excellence in the field of machine learning and pattern classification. Classification is achieved by realizing a linear or non-linear separation surface in the input space.

It initializes the set with the closest pair of points from opposite classes like the Direct SVM algorithm. As soon as the algorithm finds a violating point in the dataset it greedily adds it to the candidate set. It may so happen that addition of the violating point as a Support Vector may be prevented by other candidate Support Vectors already present in the set.

There are some commonly used kernels include:-

a) Linear Kernel is considered as follows:

$$K(x, y) = x \cdot y$$

b) Polynomial Kernel is considered as follows:

$$K(x, y) = (x \cdot y + 1)^d$$

SVM Algorithm

- 1) Define an optimal hyper plane.
- 2) Extend the above definition for non linear separable problems.
- 3) Map data to high dimensional space for easier classification to find linear decision surfaces.

II. LITERATURE REVIEW

Ajay Kumar et al. proposed a method for Human Identification Using Finger Images. They presented a new approach to improve the performance of finger-vein identification systems presented in the literature. The

proposed system simultaneously acquires the finger-vein and low resolution fingerprint images and combines these two evidences using a novel score-level combination strategy. They examine the previously proposed finger-vein identification approaches and develop a new approach that illustrates its superiority over prior published efforts. The utility of low-resolution fingerprint images acquired from a webcam is examined to ascertain the matching performance from such images. They develop and investigate two new score-level combinations, i.e., holistic and nonlinear fusion, and comparatively evaluate them with more popular score-level fusion approaches to ascertain their effectiveness in the proposed system. The rigorous experimental results presented on the database of 6264 images from 156 subjects illustrate significant improvement in the performance, i.e., both from the authentication and recognition experiments. Jinfeng Yang et al. proposed Finger-vein network enhancement and segmentation. In this paper an emerging biometric recognition based on human finger-vein patterns has received considerable attention. Due to light attenuation in imaging finger tissues, the finger-vein imagery is often seriously degraded. This makes network-based finger-vein feature representation greatly difficult in practice. In order to obtain perfect finger-vein networks, in this paper, he proposes a novel scheme for venous region enhancement and finger-vein network segmentation. First, a method aimed at scattering removal, directional filtering and false vein information suppression is put forward to effectively enhance finger vein images. Then, to achieve the high-fidelity extraction of finger-vein networks in an automated manner, matting based segmentation approach is presented considering the variations of veins in intensity and diameter. Extensive experiments are finally conducted to validate the proposed method.

Pengfei Yu et al. proposed a method Fingerprint Image Preprocessing Based on Whole-Hand Image Captured by Digital Camera. In this paper they present some fingerprint image pre-processing approaches based on a whole-hand image captured by digital camera. The pre-processing methods include key point location, finger image segmentation and fingerprint region extraction. Firstly, the key points including fingertips and valley points, which are called key points, are located from the hand contour image. Secondly, the middle finger is cropped from the hand image based on the information of the key points' positions and the knuckle's texture near the finger root. Finally, the fingerprint is extracted from the middle finger through the first knuckle's texture. Because of the low resolution of the fingerprint images, linear projection methods such as Principle Component Analysis (PCA) and Linear Discriminant Analysis (LDA) are used for fingerprint feature extraction. Experimental results on a database of 86 hands (10 impressions per hand) show that these approaches are effective.

Beining Huang et al. proposed a method a finger posture change correction method for finger-vein recognition. They found that due to posture changes when acquiring finger images, the discrepancy between different images from the same finger greatly lowers the performance of the entire system. In this paper, they define 6 types of finger posture

changes, and analysis how they influence imaging. They then proposed a method to reconstruct a 3D normalized finger model from 2D images, which can be used to map finger area in 2D image into a new 2D coordinate system, thus being able to eliminate the influence of these six types of posture changes. They choose three kinds of feature extraction method, with a test data set from a practical finger-vein recognition system including 50,700 finger-vein images. The experimental results well proved the effectiveness of this method.

Jinfeng Yang et al. proposed a technique for an improved method for finger-vein image enhancement. They found an improved approach, incorporating directional decomposition and Frangi filtering, to enhance finger veins. First, background subtraction is processed to improve image contrast and eliminate uneven illumination. Then, the vein information as ridge-like directional characters in image is detected by directional filter bank and enhanced through Frangi filtering after noise removal. Finally, the enhanced images are obtained from enhanced directional images using a finer reconstruction rule. Experimental results show that the proposed approach is much more effective and robust in enhancing finger-vein images.

Dingrui Wan et al. proposed a method Fingerprint Recognition Using Model-Based Density Map. They proposed a polynomial model to approximate the density map of fingerprints and used the model's parameters as a novel kind of feature for fingerprint representation. Thus, the density information can be utilized into the matching stage with a low additional storage cost. A decision-level fusion scheme is further used to combine the density map matching with conventional minutiae-based matching and experimental results showed a much better performance than using single minutiae-based matching.

III. PROPOSED WORK

Finger Vein is new biometric method which is increase day by day. As Finger vein identification uses the unique patterns of finger veins images to identify individuals at a high level of accuracy and security. The credibility of the finger vein authentication is higher. . This higher accuracy rate of finger vein is not unconnected with the fact that finger vein patterns are virtually impossible to forge thus it has become one of the fastest growing new biometric technology that is quickly finding its way from research labs to commercial development.

SVMs (Support Vector Machines) are a useful technique for data classification. An SVM classifies data by finding the best hyperplane that separates all data points of one class from those of the other. A newly developed method is proposed based on the Finger Vein Recognition using Segmentation and SVM algorithm.

Different Algorithms on Finger Vein Recognition has been proposed previously but there have been always need for better results or Fusion of Images. The existing Image Fusion uses algorithm which is poor in quality, more prone to noise and less accurate. Image Fusion needs further enhancement. An enhanced Human Identification algorithm is developed Using Finger Vein which based on Automatic

Trimap Generation, Repeated Line Tracking, Gabor and SVM. This algorithm is fast and more accurate with respect to other finger vein identification technique and also take less time as comparison to other technique. The proposed algorithm is In proposed algorithm consider some new parameters like PSNR, FAR, GAR and Accuracy, thus it is good in quality.

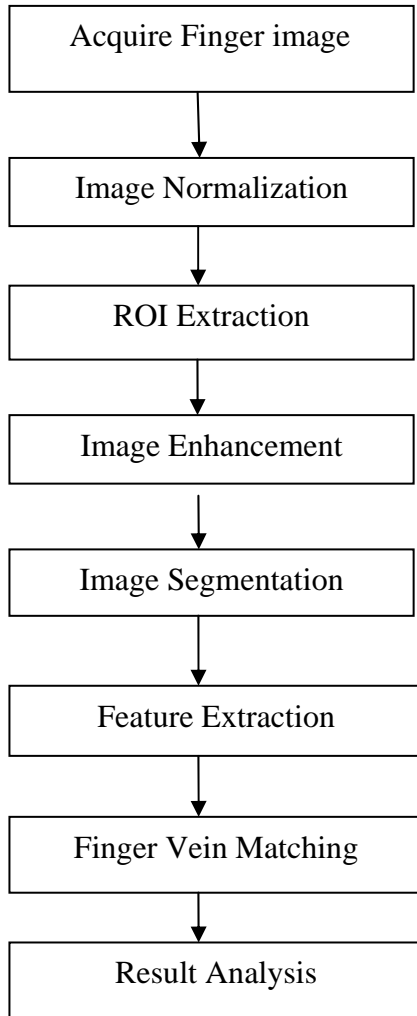


Figure 2: Flow Chart of Proposed Work.

IV.RESULTS AND DISCUSSION

This section presents the results of the proposed work. The following figures show the result of the Enhancement of the Finger Vein recognition with segmentation and SVM. This technique gives better results as compared to previous techniques. After obtaining all the necessary terms Finger Vein Recognition , Segmentation and SVM for a number of images in our database; implemented the results in the final method. The proposed method is more accurate and assures quality of result. Human Identification algorithm Using Finger Vein which based on Automatic Trimap Generation, Repeated Line Tracking, Gabor and SVM is proposed. Algorithm which is fast and accurate and thus take less time as comparison to other technique. In proposed algorithm consider some new parameters like PSNR, FAR, GAR and Accuracy, thus it is good in quality

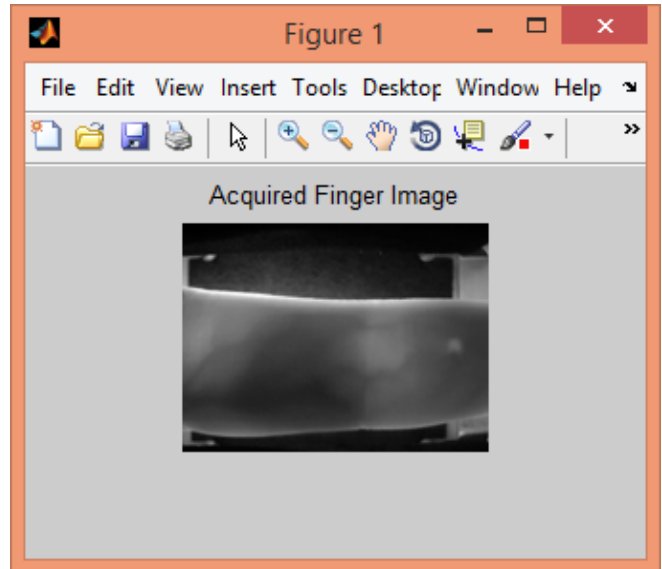


Figure 2: The output of acquired finger image

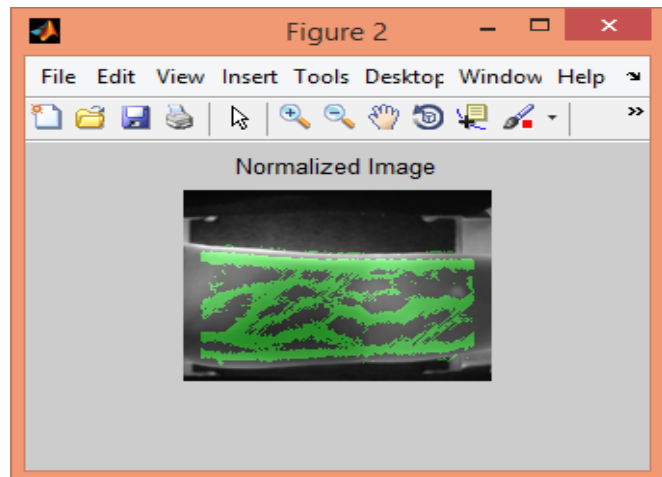


Figure 3: The output of Image Normalization.

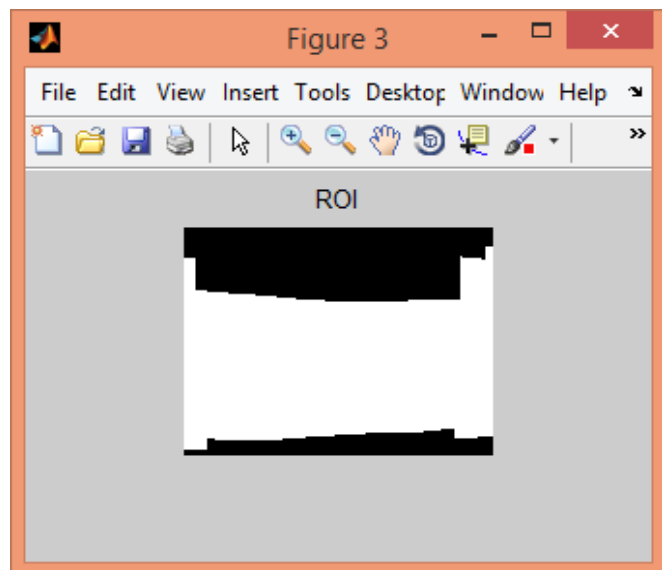


Figure 4: The output image of ROI.

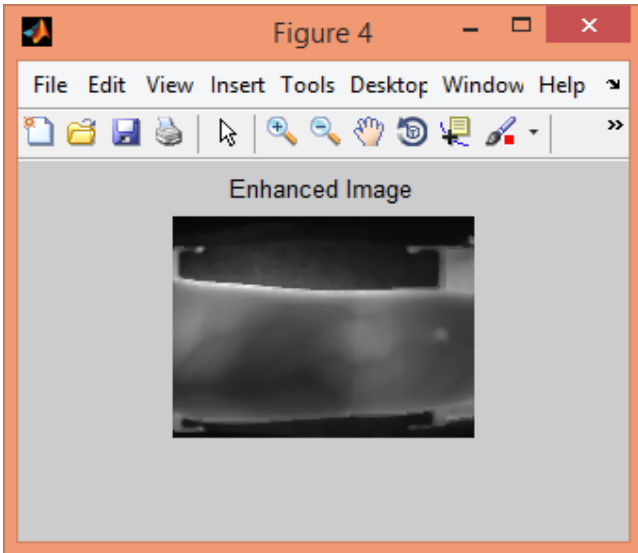


Figure 5: Output of Image Enhancement.

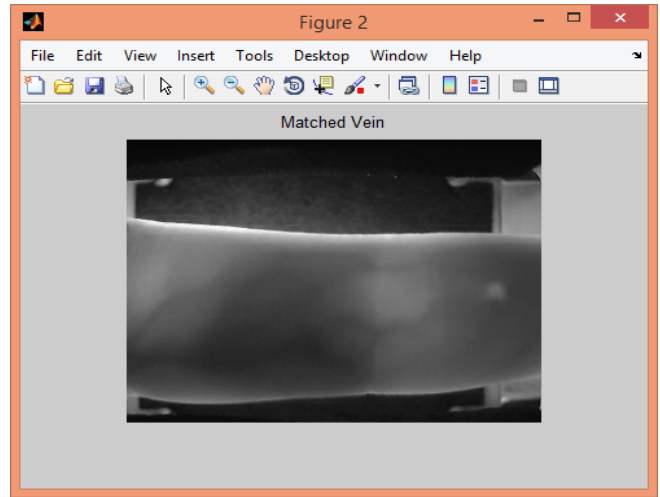


Figure 8: Image of Matched Vein.

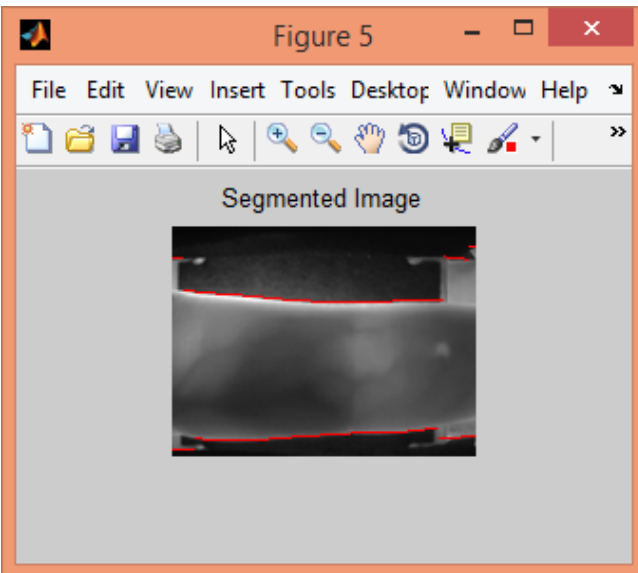


Figure 6: Output of Image Segmentation.

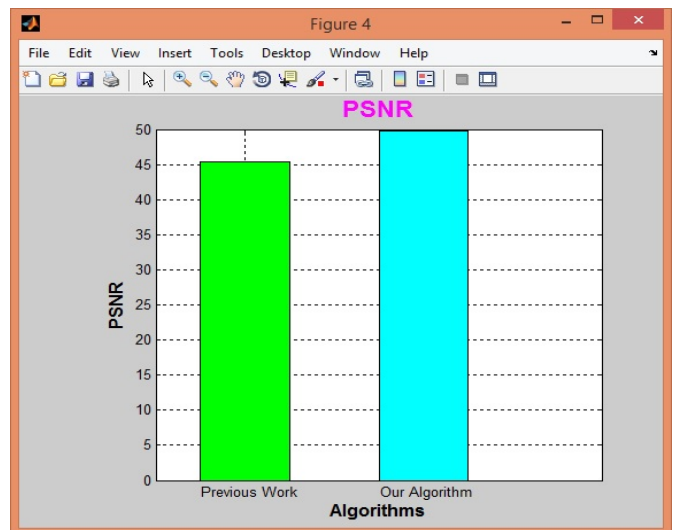


Figure 9: Graph showing results of PSNR of proposed algorithm with previous.

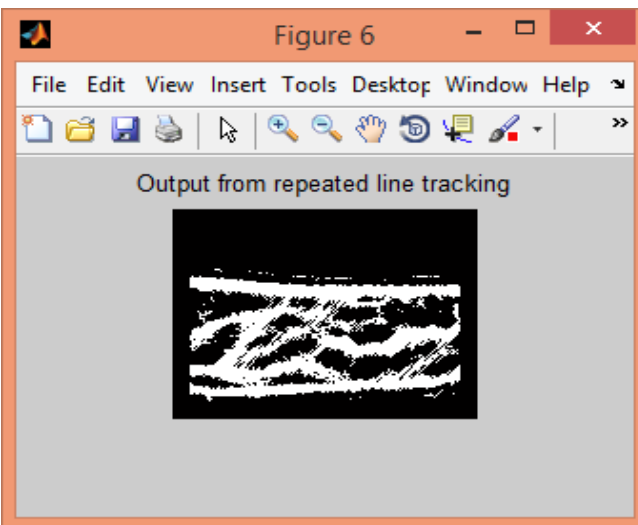


Figure 7: Output image of Repeated Line Tracking.

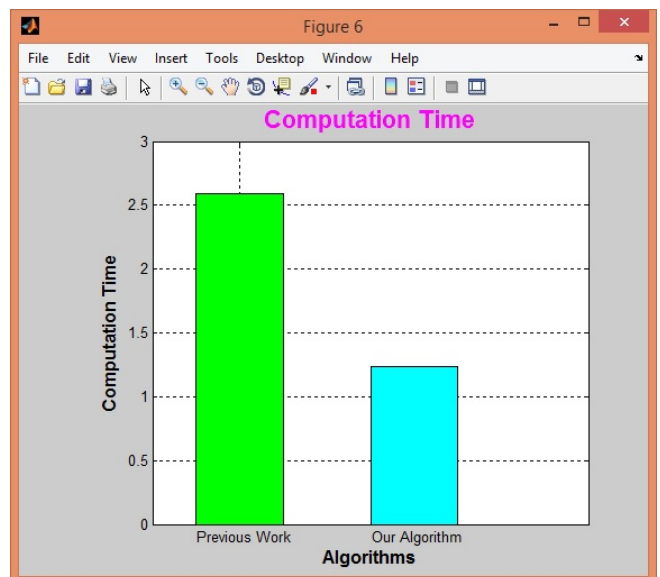


Figure 10: Graph Showing results of CT of proposed algorithm with previous.

V. CONCLUSION

Finger Vein is new biometric method which is increase day by day. As Finger vein identification uses the unique patterns of finger veins images to identify individuals at a high level of accuracy and security. The credibility of the finger vein authentication is higher. In this work, systematically develop a new approach for the finger vein feature extraction using Repeated Line tracking, Gabor filters and SVM is developed. The result comes after the combinations of these three methods are more accurate than the results of the individual method. The result comes for GAR and the FAR after comparing with the individual technique is more accurate. The GAR and FAR output for individual Repeated Line Tracking approach, Gabor and Matched filter methods after many results is very low but the combination of these three method increase the results accuracy to very high, which shows that the combination of these two method gives much better results as compared to the individual use of these methods. Using this algorithm the PSNR values also increases as compared with literature which provide high quality of work. The time taken in Enhancement and segmentation also reduces as compared with literature.

REFERENCES

- [1] Ajay Kumar, *Senior Member, IEEE*, and Yingbo Zhou; "Human Identification Using Finger Images", IEEE Transactions on image processing, Volume 21, NO. 4, APRIL 2012
- [2] Jinfeng Yang and Yihua Shi; "Finger-vein network enhancement and segmentation", Springer London 2013.
- [3] Pengfei Yu , Dan Xu , Haiyan Li , Hao Zhou; "Fingerprint Image Preprocessing Based on Whole-Hand Image Captured by Digital Camera", International conference on Computational Intelligence and Software Engineering, 2009.
- [4] Beining Huang , Beijing, ChinaShilei Liu, Wenxin Li, "A finger posture change correction method for finger-vein recognition..Computational Intelligence for Security and Defence Applications" (CISDA), IEEE Symposium, 2012.
- [5] Jinfeng Yan, Minfu Yan; "An improved method for finger-vein image enhancement". Signal Processing (ICSP), IEEE 10th International Conference 2010.
- [6] Dingrui Wan and Jie Zhou, *Senior Member, IEEE*; "Fingerprint Recognition Using Model-Based Density Map". IEEE Transactions on image processing, Volume 15, NO. 6, JUNE 2006.
- [7] Le Hoang Thai and Ha Nhat Tam; "Fingerprint recognition using standardized fingerprint model". IJCSI International Journal of Computer Science Issues, Volume 7, Issue 3, No 7, May 2010.
- [8] Francesco Turrone, Davide Maltoni, Raffaele Cappelli, Dario Maio; "Improving Fingerprint Orientation Extraction". IEEE Transactions on Information Forensics and Security, Volume 6, NO. 3, SEPTEMBER 2011.
- [9] Haiyun Xu, Raymond N. J. Veldhuis, Tom A. M. Kevenaar, and Ton A. H. M. Akkermans; "A Fast Minutiae-Based Fingerprint Recognition System". IEEE Systems Journal, Volume 3, NO. 4, DECEMBER 2009.
- [10] Sharath Pankanti, Salil Prabhakar, Anil K. Jain; "On the Individuality of Fingerprints". IEEE Transactions on Pattern Analysis and Machine Intelligence, Volume 24, NO. 8, AUGUST 2002.
- [11] Jianjiang Feng, Anil K. Jain; "Fingerprint Reconstruction: From Minutiae to Phase". IEEE Transactions on Pattern Analysis and Machine Intelligence Volume 33, NO. 2, FEBRUARY 2011.
- [12] Jingxin Hong, Wu Lin, Hao Zhang, Lin Li; "Image Mosaic Based on SURF Feature Matching". IEEE International Conference on Information Science and Engineering, 2009.
- [13] Naoto Miura, Akio Nagasaka, Takafumi Miyatake; "Feature extraction of finger-vein patterns based on repeated line tracking and its application to personal identification". Springer-Verlag 2004
- [14] Pandillapalli Gowtham, Ch.Sindhu, C.Sudheer Kumar, Ch.Chandra Sekhar, M.s.Abdullah; " Identification of Finger Images using Score-Level Fusion". International Journal of Engineering Science Invention, ISSN: 2319 – 6726, Volume 2, NO. 2 FEBRUARY 2013.
- [15] Elif Aybar; "Sobel Edge Detection Method for MATLAB". Porsuk Vocational School, Anadolu University, Eskisehir, 2010.
- [16] Kefeng Li; "Biometric Person Identification Using Near-infrared Hand-dorsa Vein Images". University of Central Lancashire in collaboration with North China University of Technology, 2013.
- [17] Jinfeng Yang and Xu Li; "Efficient Finger Vein Localization and Recognition". IEEE International Conference on Pattern Recognition, 2010.
- [18] Jayant V. Kulkarni, Bhushan D. Patil and Raghunath S. Holambe; "Orientation feature for fingerprint matching". Pattern Recognition Society. MARCH 2006.
- [19] David Mulyono and Horng Shi Jinn; "A Study of Finger Vein Biometric for Personal Identification". IEEE, JUNE 2008.
- [20] Nurhafizah Mahri, Shahrel Azmin Sundi and Bakhtiar Affendi Rosdi; "Finger Vein Recognition Algorithm Using Phase Only Correlation". IEEE, MAY 2010.